

**SVS Eco valve plug A-18mm screw terminal**

 3-pol. + PE, 0,5 - 1,5mm<sup>2</sup>, 6 - 8mm

Art.No.: 7000-29405-0000000

Weight: 0.028

Country of origin: HU

Model designation: MSVSE-EB5K-M16 SVS Eco

Form A (18 mm) for pressure switch

250 V AC/DC

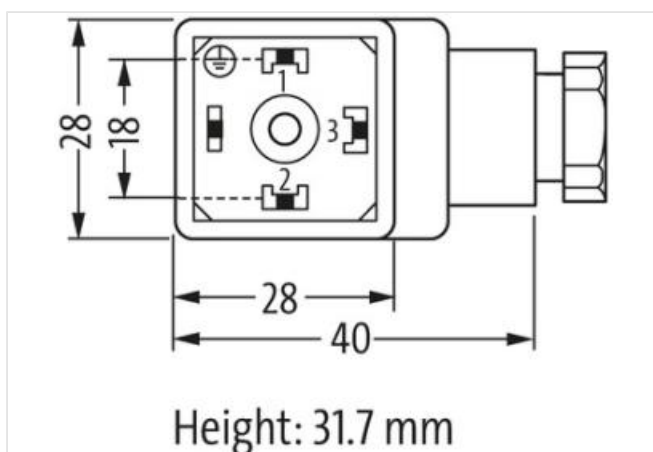
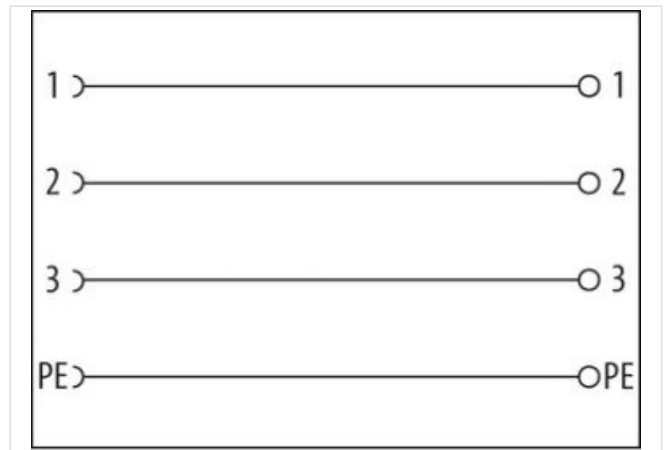
without components

metric

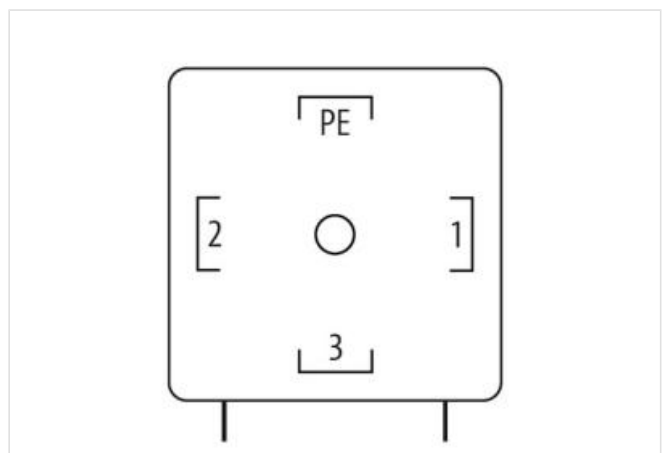
field-wireable

Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)
**Illustration**


Product may differ from Image


**Side 1**

Mounting method	inserted, screwed
Degree of protection (EN IEC 60529)	IP65
<b>Commercial data</b>	
ECLASS-6.0	27279221
ECLASS-6.1	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440105
ECLASS-10.1	27440105
ECLASS-11.1	27440105
ECLASS-12.0	27440105
ETIM-5.0	EC002635
customs tariff number	85366990
GTIN	4048879187435
Packaging unit	1
<b>Electrical data   Supply</b>	
Operating voltage AC max.	250 V
Operating voltage DC max.	250 V
Current operating per contact max.	10 A
<b>Installation</b>	
Connection cross section min.	0,5 mm <sup>2</sup>
Connection cross section max.	1,5 mm <sup>2</sup>
<b>Installation   Connection</b>	
Tightening torque	0,4 Nm
Tightening torque clamping screw	0,2 Nm
Mounting set	M16 x 1.5
<b>Installation   Pin assignment</b>	
No. of poles	3 + PE
<b>Device protection   Electrical</b>	
Additional condition protection degree	inserted, screwed
<b>Mechanical data   Material data</b>	
Material housing	PA
Color housing	black
Material gasket	NBR
<b>Mechanical data   Mounting data</b>	
fastening screw	M3
Clamping range min.	6 mm
Clamping range max.	8 mm
<b>Environmental characteristics   Climatic</b>	
Operating temperature min.	-40 °C
Operating temperature max.	90 °C
<b>Important installation notes</b>	
Note on strain relief	Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.
Note on bending radius	<b>Attention:</b> Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.